


MRS System 2000

12" - 18"
1 3/4" high
Snap-lock

.032 or .040 Aluminum
22, 24 ga Galvalume
16 oz Copper

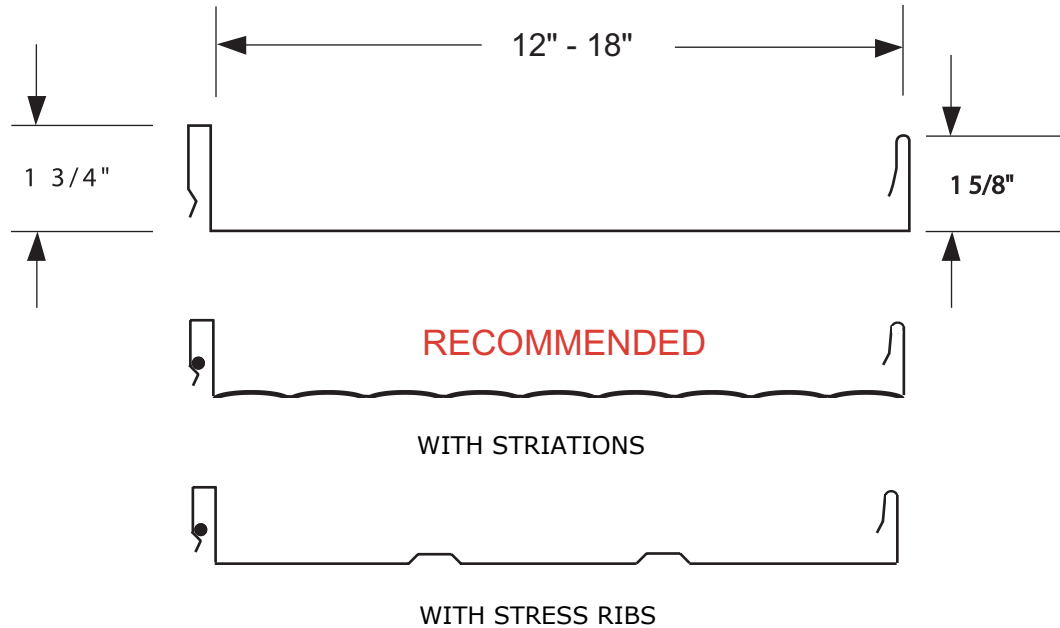

U.L. 580 Class 90 Certified

ASTM E1680-95, E1646-95, E1592-95

Ideal for large commercial installations

Material: .032 or .040 Aluminum, 22 or 24 ga Galvalume, 16 oz Copper
12" - 18" o.c.

Features: Flat
* Striations (MRS Recommended)
Stress Ribs
Optional Sealant in Female leg of panel

Requirements: Solid substrate, Open Framing
30# Felt or Ice & Water Shield
Clips spaced at 30" o.c. max (2 Fasteners per Clip)
Clips spaced at 48" o.c. max for 18" panel on Open Framing (2 Fasteners per Clip)
Clips spaced at 60" o.c. max for 16" panel on Open Framing (2 Fasteners per Clip)

Finish: Hylar 5000[®] or Kynar 500[®]

Locations:

7687 Mikron Drive
Stanley, NC 28164
Tel: 704-820-3110
Fax: 704-820-0113

370-C Allied Drive
Conway, SC 29526
Tel: 843-365-6673
Fax: 843-365-6683

3214 Hanover Road
Johnson City, TN 37604
Tel: 423-239-0013
Fax: 423-447-7150



METAL ROOFING
Systems, Inc

Website: www.metalroofingsystems.biz