


MRS System 1000

12" - 20" o.c.
1-1/2" high
Snap-lock

.032 aluminum
22 or 24 ga galvalume
16 oz. copper

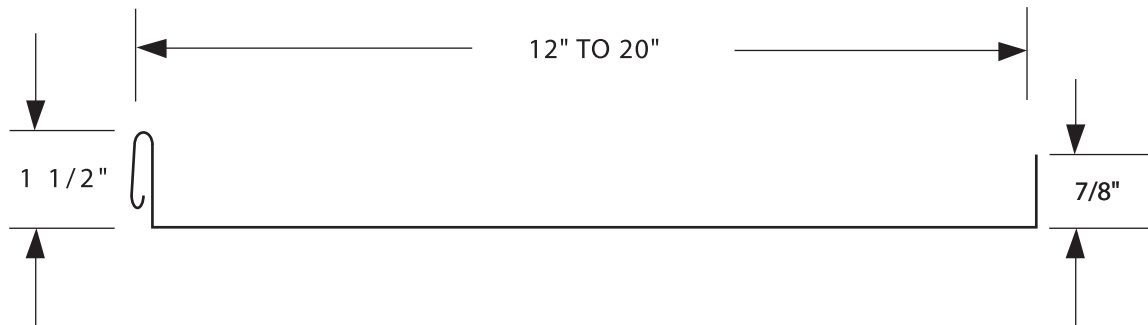

ASTM E1592 Tested
Ideal for residential applications

Material: .032 Aluminum, 22 or 24 ga Galvalume, 16 oz. Copper
12" to 20" o.c.

Features: Striations (Recommended)
Flat
Stress Ribs

Requirements: Solid Substrate
Ice & Water Shield or Synthetic Underlayment
Minimum Roof Pitch: 3" on 12"

Finish: Kynar 500

Locations:

7687 Mikron Drive
Stanley, NC 28164
Tel: 704-820-3110
Fax: 704-820-0113

370 Allied Drive, Unit C
Conway, SC 29526
Tel: 843-347-6673
Fax: 843-347-6693

3214 Hanover Road
Johnson City, TN 37604
Tel: 423-434-0535
Fax: 423-434-0537



METAL ROOFING
Systems, Inc

Website: www.metalroofingsystems.biz